

This Page Is Inserted by IFW Operations  
and is not a part of the Official Record

## **BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.


Defects in the images may include (but are not limited to):

- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning documents *will not* correct images,  
please do not report the images to the  
Image Problem Mailbox.**

**THIS PAGE BLANK (USPTO)**



Europäisches Patentamt  
European Patent Office  
Office européen des brevets



(11) **EP 1 152 632 A2**

(12)

## EUROPEAN PATENT APPLICATION

(43) Date of publication:  
07.11.2001 Bulletin 2001/45

(51) Int Cl.7: **H04Q 11/00**

(21) Application number: **01303811.2**

(22) Date of filing: **26.04.2001**

(84) Designated Contracting States:  
**AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU  
MC NL PT SE TR**  
Designated Extension States:  
**AL LT LV MK RO SI**

(72) Inventor: **Hill, Edward Arthur**  
**Chapel Hill, North Carolina 27514 (US)**

(30) Priority: **05.05.2000 US 566189**

(74) Representative: **McKechnie, Neil et al**  
**Kennedys Patent Agency Limited,**  
**Floor 5, Queens House,**  
**29 St. Vincent Place**  
**Glasgow G1 2DT (GB)**

(71) Applicant: **Cronos Integrated Microsystems, Inc.**  
**North Carolina 27709-3942 (US)**

(54) **Microelectromechanical optical cross-connect switches having reduced numbers of reflectors**

(57) Reduced configuration Optical Cross-Connect (OXC) switches can include N inputs to the OXC switch and N outputs from the OXC switch, where N is at least 3. The N x N OXC switch provides N! states, wherein the N! states optically couple any one of the N inputs to any one of the N outputs. The N x N OXC switch also includes a number of switching nodes that are selectively optically coupled to the N inputs and N outputs. Each

of the number of switching nodes is configurable in at least one of a switching configuration and a pass-through configuration to provide selectively switched optical radiation therefrom and wherein the number of switching nodes is equal to ceiling  $[\ln(N!)/\ln(2)]$  to provide the N! states of the N x N OXC switch. The N x N OXC switch further includes at least one optical transmission apparatus coupled to at least two of the switching nodes. Related methods are also disclosed.

**EP 1 152 632 A2**

## Description

### Field of the Invention

**[0001]** The present invention relates to microelectromechanical systems in general, and more particularly, to microelectromechanical optical switches.

### Background of the Invention

**[0002]** MicroElectroMechanical (MEM) technology has been used in a wide range of applications. For example, MEM devices have been used in optical switching systems to switch optical radiation from the switch inputs to selected switch outputs. Conventional optical switches, sometimes referred to as Optical Cross-Connect (OXC) switches can include an  $N \times N$  array of reflectors to reflect optical radiation from any switch input to any switch output. Each input and output can be aligned with an associated row or column of the array. For example, in a  $2 \times 2$  MEM OXC switch having 2 inputs and 2 outputs, the first and second inputs can be aligned with first and second rows of the  $2 \times 2$  array and the first and second outputs can be aligned with first and second columns of the  $2 \times 2$  array. In operation, a selected reflector of the  $2 \times 2$  array can be used to reflect the optical radiation from any switch input to any switch output.

**[0003]** The selected reflector can be located in the array where the column associated with input and the row associated with the output intersect. The selected reflector can be placed in a reflecting position to reflect the optical radiation from the input to the selected output. At least some of the other reflectors can be placed in non-reflecting positions so as not to impede the propagation of the optical radiation from the input to the selected reflector and to the output.

**[0004]** As the number of inputs and outputs of conventional MEM OXC switches increase, so may the number of reflectors used to provide the operations thereof. The number of reflectors,  $R$ , used in a conventional  $N \times N$  OXC generally can be expressed as:

$$R=N^2$$

Where  $N$  is the number of inputs and outputs of the switch. For example, a  $2 \times 2$  OXC switch may include 4 reflectors, a  $3 \times 3$  OXC switch may include 9 reflectors, and a  $4 \times 4$  OXC switch may include 16 reflectors etc. A conventional  $2 \times 2$  MEM OXC **100** is shown in **FIG. 1**.

**[0005]** Referring to **FIG. 1**, each of the reflectors **101-104** includes a reflective surface **105-108** and can be placed in either a reflecting or non-reflecting position. Accordingly, the MEM OXC **100** can be placed in  $2^{N^2}$  possible configurations, where each configuration can be defined as a unique combination of reflector positions. Unfortunately, it may not be possible to use all of the  $2^{N^2}$  configurations. In particular, some of reflector

configurations may include configurations where two or more reflectors in a row or column of the array are in the reflecting state, thereby blocking the reflection of the optical radiation from the input to the output. For example, to switch optical radiation from input **I1** to output **O1**, reflectors **102** and **103** are placed in non-reflecting positions to allow the optical radiation to propagate from input **I1** to output **O1**. Therefore, some of the possible  $2^{N^2}$  configurations may not allow the MEM OXC to operate properly.

**[0006]** Unfortunately, as the number of inputs and outputs increase, so may the number of reflectors. For example, a  $5 \times 5$  OXC switch may use  $5^2$  reflectors, a  $6 \times 6$  may use 36 and so on. It is known to reduce the number of reflectors by providing reflectors with reflective surfaces on opposite sides of the reflectors as shown, for example, in **FIGs. 2A** and **2B**. According to **FIGs. 2A** and **2B**, one reflector **200** can operate as a  $2 \times 2$  MEM OXC switch **201**. In particular, inputs **I1** and **I2** are oriented in first and second directions **225**, **235** relative to the reflector **200**. Outputs **O1** and **O2** are oriented in the first and second directions respectively relative to the reflector **200**. When the reflector **200** is in the reflecting position, as shown in **FIG. 2A**, optical radiation can be reflected from input **I1** to output **O2** and from input **I2** to output **O1**. When the reflector **200** is in the non-reflecting position, as shown in **FIG. 2B**, optical radiation can pass from the input **I1** to the output **O1** or from the input **I2** to the output **O2**. Accordingly, the reflector **200** can operate as a  $2 \times 2$  MEM OXC switch **201**. Notwithstanding the above, there continues to exist a need to provide improved OXC switches having a reduced number of reflectors therein.

### Summary of the Invention

**[0007]** Embodiments of the present invention can allow MicroElectroMechanical (MEM) Optical Cross-Connect (OXC) switches to have a reduced number of reflectors by providing  $N$  inputs to the OXC switch and  $N$  outputs from the OXC switch, where  $N$  is at least 3. The  $N \times N$  OXC switch provides  $N!$  states, wherein the  $N!$  states optically couple any one of the  $N$  inputs to any one of the  $N$  outputs. The  $N \times N$  OXC switch also includes a number of switching nodes that are selectively optically coupled to the  $N$  inputs and  $N$  outputs. Each of the number of switching nodes is configurable in at least one of a switching configuration and a pass-through configuration to provide selectively switched optical radiation therefrom and wherein the number of switching nodes is equal to ceiling  $\lceil \ln(N!)/\ln(2) \rceil$  to provide the  $N!$  states of the  $N \times N$  OXC switch. The  $N \times N$  OXC switch further includes at least one optical transmission apparatus coupled to at least two of the switching nodes.

**[0008]** Reducing the number of switches used in an  $N \times N$  MEM OXC switch may allow for  $N \times N$  switches that use fewer actuators than conventional  $N \times N$  switches. In particular, conventional  $N \times N$  switches may in-

clude  $N^2$  switches to provide  $N!$  switch settings. Such a conventional switch may use, for example, as little as 0.04% of the  $2^{N^2}$  states for a  $4 \times 4$  switch. In contrast,  $N \times N$  switches according to the present invention can include ceiling  $\lceil \ln(N!)/\ln(2) \rceil$  reflectors. Such a  $4 \times 4$  switch according to the present invention may utilize 75% of its respective possible states. For example, a conventional  $4 \times 4$  switch may include 16 switches whereas an  $N \times N$  switch according to the present invention may include 5 switches. Also, fewer switches and actuators may be formed on a smaller substrate area, thereby allowing a reduction in the footprint of an  $N \times N$  switch according to the present invention.

[0009] In other embodiments according to the present invention a  $2 \times 2$  array of reflectors is arranged in first and second rows and first and second columns. First, second and third inputs to the  $N \times N$  OXC switch are selectively optically coupled to at least one of the  $2 \times 2$  array of reflectors. First, second and third outputs from the  $N \times N$  OXC switch are selectively optically coupled to at least one of the  $2 \times 2$  array of reflectors. Related method embodiments for all of the above described OXC switches also may be provided. Accordingly, reduced numbers of reflectors and/or actuators may be used in optical cross connect switches.

[0010] In other embodiments according to the present invention, an  $N \times N$  OXC switch includes a first movable reflector that is optically coupled to a first input and a second input. The first movable reflector receives first optical radiation in a first direction via the first input and receives second optical radiation in a second direction via the second input. The first moveable reflector provides the first optical radiation to a first output therefrom that propagates in the first direction when the first moveable reflector is in a non-reflecting position and provides the second optical radiation to the first output that propagates in the first direction when the first moveable reflector is in a reflecting position. A second movable reflector provides optical radiation from a third input there-to in the second direction to a second output therefrom when the second moveable reflector is in the non-reflecting position. An optical transmission apparatus optically couples the first output of the first moveable reflector to the third input of the second movable reflector and changes the direction of propagation of the optical radiation at the first output from the first direction to the second direction at the third input.

[0011] In other embodiments according to the present invention, the optical transmission apparatus is a fixed reflector. In yet other embodiments according to the present invention, the optical transmission apparatus is a linear or curvilinear waveguide.

### Brief Description of the Drawings

[0012]

FIG. 1 is a plan view of a conventional  $2 \times 2$  Micro-

ElectroMechanical (MEM) Optical Cross-Connect (OXC) having four reflectors.

FIG. 2A and 2B are plan views of a conventional  $2 \times 2$  MEM OXC switch having one reflector.

FIG. 3 is a table of exemplary settings of a  $2 \times 2$  MEM OXC switch.

FIG. 4 is a block diagram that illustrates embodiments of a  $3 \times 3$  MEM OXC switch according to the present invention.

FIG. 5 is a schematic diagram that illustrates embodiments of a  $3 \times 3$  MEM OXC switch according to the present invention.

FIG. 6 is a plan view that illustrates embodiments of a  $3 \times 3$  MEM OXC switch according to the present invention.

FIG. 7 is a plan view that illustrates non-orthogonal embodiments of a  $3 \times 3$  MEM OXC switch according to the present invention.

FIG. 8 is a table that illustrates 6 switch settings for operations of embodiments of a  $3 \times 3$  MEM OXC switch according to the present invention.

FIGs. 9A - 9F is a series of plan views that illustrate embodiments of moveable reflector positions for each of the six switch settings of FIG. 8 in a  $3 \times 3$  MEM OXC switch according to the present invention.

FIG. 10 is a block diagram that illustrates embodiments of a  $4 \times 4$  MEM OXC switch according to the present invention.

FIG. 11 is a schematic diagram that illustrates embodiments of a  $4 \times 4$  MEM OXC switch according to the present invention.

FIG. 12 is a plan view that illustrates embodiments of a  $4 \times 4$  MEM OXC switch according to the present invention.

FIG. 13 is a table that illustrates 24 switch settings for operations of embodiment 6 a  $4 \times 4$  MEM OXC switch according to the present invention.

FIG. 14A - 14Y' is a series of plan views that illustrate embodiments of first through fifth moveable reflectors in reflecting and non-reflecting positions for 24 switch settings of FIG. 13 according to the present invention.

FIG. 15 is a schematic diagram that illustrates another embodiment of a  $4 \times 4$  MEM OXC switch including 5 switching nodes and first and second optical transmission apparatus according to the present invention.

FIG. 16 is a plan view that illustrates another embodiment of a  $4 \times 4$  MEM OXC switch including 5 moveable reflectors and 2 fixed reflectors according to the present invention.

FIG. 17 is a schematic diagram that illustrates another embodiment of a  $4 \times 4$  MEM OXC switch including 6 switching nodes and first and second optical transmission apparatus according to the present invention.

### Detailed Description of the Preferred Embodiments

[0013] The present invention now will be described more fully hereinafter with reference to the accompanying drawings, in which preferred embodiments of the invention are shown. This invention may, however, be embodied in many different forms and should not be construed as limited to the embodiments set forth herein; rather, these embodiments are provided so that this disclosure will be thorough and complete, and will fully convey the scope of the invention to those skilled in the art. Like numbers refer to like elements throughout.

[0014] In the drawings, the size of regions may be exaggerated for clarity. Like numbers refer to like elements throughout. It will be understood that when an element is referred to as being "connected" or "coupled" to another element, it can be directly connected or coupled to the other element or intervening elements may be present. In contrast, when an element is referred to as being "directly connected" or "directly coupled" to another element, there are no intervening elements present.

[0015] As used herein, the term "optical radiation" can include radiation that can be used to transmit data in a communications system, such as radiation in the visible, ultraviolet, infrared and/or other portions of the electromagnetic radiation spectrum. Although the present invention is described herein by reference to MEM OXC switches, it will be understood that the present invention may be utilized in other types of optical switches, such as non-MEM technology optical switches or nodes that switch optical radiation from a number of inputs to a number of outputs.

[0016] It will be understood that embodiments of the present invention are illustrated using plan views and schematic drawings. The schematic drawings include nodes that can switch optical radiation from inputs thereto to output therefrom. The schematic diagram therefore can illustrate generic processing of optical radiation.

[0017] According to the present invention, the number of reflectors used to provide the functionality of an N x N MEM OXC switch can be reduced. The invention stems, in-part, from the realization that reflectors can be thought of as binary digits (bits) that can be set to one of two states: reflecting and non-reflecting. The reflectors switch between the two states by moving between the reflecting and non-reflecting positions. The reflectors can function as switches that couple any input thereto to any output thereof. This binary operation can be used to determine a reduced number of moveable reflectors that can provide the needed functions of the N x N switch. The movement of the reflectors can be provided by local or global actuation using, for example, magnetic or mechanical actuation. Mechanical actuation of reflectors is described, for example, in U.S. Patent Application 09/542,170, entitled "Microelectromechanical Optical Cross-Connect Switches Including Mechanical Actuators and Methods of Operating Same" which is commonly assigned to the assignee of the

present application and is hereby incorporated herein by reference. Magnetically actuated MEM OXC switches are described further, for example, in U.S. Patent Application No. 09/489,264 entitled "MEMS Optical Cross-Connect Switch", the disclosure of which is hereby incorporated herein by reference in its entirety. Other types of local and/or global actuation may be used.

[0018] Specifically, an N x N switch can provide any one of N! switch settings, where a switch setting is defined as switching N inputs to N outputs. For example, FIG. 3 is a table of exemplary settings of a 2 x 2 MEM OXC switch. As shown in FIG. 3, the 2 x 2 MEM OXC switch has 2! or 2 settings. In setting 1, input I1 is optically coupled to output O1 and input I2 is optically coupled to output O2. In setting 2, input I1 is optically coupled to output O2 and input I2 is optically coupled to output O1.

[0019] The reduced number of "bits" (or moveable reflectors) needed to provide all of the switch settings of an N x N MEM OXC switch can be expressed as:

$$2^M \geq N! \quad (1)$$

where M is the smallest integer value which makes equation (1) true. Solving for the number of "bits":

$$M = \text{ceiling}[\ln(N!)/\ln(2)] \quad (2)$$

where M is the minimum number of moveable reflectors, N is the number of inputs and outputs of the switch, ln denotes the natural logarithm, the "!" denotes the factorial operation, and the "ceiling" operator raises a fractional number to the next higher integer (e.g., ceiling(.5) = 1). For example, 3 moveable reflectors can be used to implement a reduced 3 x 3 MEM OXC switch according to the present invention and 5 moveable reflectors can be used to implement a reduced 4 x 4 MEM OXC switch according to the present invention.

[0020] Reducing the number of reflectors used in an N x N MEM OXC switch may allow for N x N switches that use fewer actuators than conventional N x N switches. In particular, conventional N x N switches may include N<sup>2</sup> reflectors to provide N! switch settings. Such a conventional switch may use as little as 0.04% of the N<sup>2</sup> states in a 4 x 4 switch. In contrast, N x N switches according to the present invention can include ceiling [ln(N!)/ln(2)] switching reflectors. Such a 4 x 4 switch according to the present invention may utilize 75% of its respective possible states. For example, a conventional 4 x 4 switch may include 16 reflectors whereas an embodiment of a 4 x 4 switch according to the present invention may include 5 switching reflectors and 2 non-switching reflectors. Also, fewer reflectors and actuators may be formed on a smaller substrate area, allowing a reduction in the footprint of an N x N switch according

to the present invention.

[0021] FIG. 4 is a block diagram that illustrates embodiments of a 3 x 3 MEM OXC switch according to the present invention. According to FIG. 4, a reduced number of switches 401-403 can provide the interconnect needed to switch any of inputs I1-I3 to any of outputs O1-O3. As determined by equations (1) and (2), the 3 x 3 MEM OXC switch can include three switches to provide the needed 6 settings (3!) of the 3x3 MEM OXC switch.

[0022] Each of the switches 401-403 can operate as a 2 x 2 switch. In particular, each switch 401-403 can have 2 inputs and 2 outputs, wherein optical radiation present at the inputs can be directed to the outputs by switching the optical radiation or by passing the optical radiation through ("pass-through"). For example, switch 402 can switch optical radiation from an input 402a to an output 402d or can pass-through the optical radiation from the input 402a to an output 402c. Similarly, the switch 402 can switch optical radiation from an input 402b to the output 402c or pass-through the optical radiation from the input 402b to the output 402d.

[0023] The switches 401-403 can be coupled together to provide the overall function of a 3 x 3 switch. Accordingly, optical energy can be switched from any input I1, I2, and/or I3 to any output O1, O2, and/or O3. In particular, the switch 402 can switch optical energy from input I1 (402b) and/or input I2 (402a) to the switch 403 (via 402c) and/or to the switch 401 (via 402d). The switch 401 can switch received optical energy (401a, 401b) to the switch 403 (via 401c) and/or to the output O1 (via 401d). The switch 403 can switch received optical energy from the switch 401 (401a) and/or the switch 402 (401b) to the output O2 (via 403d) and/or to the output O3 (via 403c). The dashed line through the switch 401 indicates that the output 402c can be coupled to the input 403b without being switched by the switch 401.

[0024] Moreover, optical energy can be switched from a first input to a first output without blocking the switching of optical energy from a second input to a second output. For example, according to FIG. 4, switching optical energy from input I1 to output O2 does not block (or preclude) switching optical energy from input I2 to output O1 or to output O3.

[0025] FIG. 5 is a schematic diagram that illustrates embodiments of a 3 x 3 MEM OXC switch 400 according to the present invention. According to FIG. 5, a 2 x 2 array includes first and second columns and first and second rows that define first and second optical paths 411, 412 in a first direction 425 and third and fourth optical paths 413, 414 in a second direction 435. The optical paths are aligned with inputs and outputs of the MEM OXC switch.

[0026] In particular, input I1 is aligned with the first optical path 411, input I2 is aligned with the fourth optical path 414, and input I3 is aligned with the third optical path 413. Output O1 is aligned with the first optical path 411, output O2 is aligned with the second optical path

412, and output I3 is aligned with the third optical path 413.

[0027] As determined by, Equation (1), the 3 x 3 MEM OXC switch 400 includes the three switches or "switching nodes" 401-403 to provide the needed 6 settings (3!) of the 3x3 MEM OXC switch 400. The first, second, and third nodes 401-403 can selectively switch optical radiation from one optical path to another to propagate the optical radiation from any input to any output. For example, the first node 401 can switch optical radiation from the first optical path 411 to the third optical path 413 for output via the output I3 or the first node 401 can pass the optical radiation through to the input I1.

[0028] An optical transmission apparatus 405 can optically couple an output of the second node 402 to an input of the third node 403 for output via the output O2 or O3. The optical transmission apparatus 405 changes the direction of the propagation of optical radiation received from the second node 402 from the second direction 435 to the first direction 425 at the input to the third node 403.

[0029] In preferred embodiments, the optical transmission apparatus 405 is non-switching. Accordingly, the optical transmission apparatus 405 can be a fixed reflector, a linear waveguide, a curvilinear waveguide and/or other apparatus that can change the direction of the propagation of the optical radiation. However, a switching apparatus also may be used, but need not be moved between reflecting and non-reflecting positions.

[0030] FIG. 6 is a plan view that illustrates embodiments of a 3 x 3 MEM OXC switch 500 according to the present invention. According to FIG. 6, a 2 x 2 array of reflectors 501-504 are arranged, as shown, in first and second columns and first and second rows to define first and second optical paths 511, 512 in a first direction 525 and third and fourth optical paths 513, 514 in a second direction 535. The optical paths are aligned with inputs and outputs of the MEM OXC switch 500.

[0031] In particular, input I1 is aligned with the first optical path 511, input I2 is aligned with the fourth optical path 514, and input I3 is aligned with the third optical path 513. Output O1 is aligned with the first optical path 511, output O2 is aligned with the second optical path 512, and output O3 is aligned with the third optical path.

In a preferred embodiment, at least one of the inputs (here input I1) is located on a separate side of the MEM OXC 500 switch from the other inputs. In another embodiment, at least one of the outputs (here output O3) is located on a separate side of the MEM OXC switch 500 from the other outputs.

[0032] The first, second, and third reflectors 501-503 are moveable between a reflecting position and a non-reflecting position. The first, second, and third reflectors 501-503 are oriented 45 degrees relative to the optical paths and have reflective material on opposite surfaces. Accordingly, the first, second, and third reflectors 501-503 can be used to reflect or "switch" optical radiation from the inputs along the optical paths to propa-

gate the optical radiation from any input to any output. The reflective material can be, for example, gold on silicon or gold on polysilicon. Other reflective materials may be used.

**[0033]** FIG. 7 is a plan view that illustrates non-orthogonal embodiments of a 3 x 3 MEM OXC switch according to the present invention. It will be understood that the present invention can be embodied in switches that use reflectors that have non-orthogonal orientations with respect to each other, as shown, for example, in FIG. 7. FIG. 8 is a table that illustrates the 6 switch settings for operations of a 3 x 3 MEM OXC switch according to the present invention. According to FIG. 8, a first switch setting optically couples the input I1 to the output O1, the input I2 to the output O2, and the input I3 to the output O3. A second switch setting optically couples the input I1 to the output O1, the input I2 to the output O3, and the input I3 to the output O2. A third switch setting optically couples the input I1 to the output O2, the input I2 to the output O1, and the input I3 to the output O3. A fourth switch setting optically couples the input I1 to the output O3, the input I2 to the output O2, and the input I3 to the output O1. A fifth switch setting optically couples the input I1 to the output O2, the input I2 to the output O3, and the input I3 to the output O1. A sixth switch setting optically couples the input I1 to the output O3, the input I2 to the output O1, and the input I3 to the output O2. Accordingly, the six switch settings of FIG. 8 allow any of the inputs to be optically coupled to any of the outputs.

FIGs. 9A-F is a series of plan views that illustrate embodiments of moveable reflector 601-605 positions for each of the six switch settings of FIG. 8 in a 3 x 3 MEM OXC switch 700 according to the present invention. As shown in FIG. 8, a 2 x 2 array of reflectors 701-704 are arranged, in first and second columns and first and second rows to define first and second optical paths 711, 712 in a first direction 725 and third and fourth optical paths 713, 714 in a second direction 735. The optical paths are aligned with inputs and outputs of the MEM OXC switch 700.

**[0034]** According to FIGs. 9A-9F, solid shading indicates that the corresponding moveable reflector 701-703 is in the reflecting position, no shading indicates that the reflector is in the non-reflecting position, and half-shading indicates that the reflector is fixed. When a moveable reflector is in the reflecting position, optical radiation incident along a first optical path reflects from the first optical path to a second optical path orthogonal to the first optical path. In contrast, when a moveable reflector is in the non-reflecting position, optical radiation incident along the first optical path will "pass-through" and continue to propagate along the first optical path.

**[0035]** As shown in FIG. 9A, in a first setting, first, second, and third moveable reflectors 701-703 are in the respective non-reflecting positions. Accordingly, optical radiation received at the input I1 "passes-through" to the

output O1. Optical radiation received at the input I2 "passes-through" the second moveable reflector 702 and reflects from the fixed reflector 704 to the output O2, and optical radiation received at the input I3 "passes-through" to the output O3. Accordingly, the first setting can provide for 3 of the possible functions provided by the MEM OXC switch 200. In other words, the same setting may be used to switch input I1 to output O1 or to switch input I2 to output O2 or to switch input I3 to output O3.

**[0036]** In a second setting, (FIG. 9B) the third moveable reflector 703 is in the reflecting position and the first and second reflectors 701-702 are in the non-reflecting position. Accordingly, optical radiation received at the input I1 "passes-through" to the output O1. Optical radiation received at the input I2 "passes-through" the second moveable reflector 702 and reflects from the fixed reflector 704 to the third moveable reflector 703 which reflects the optical energy to the output O3. Optical radiation received at the input I3 "passes-through" the first moveable reflector 701 and reflects from the third moveable reflector 703 to the output O2.

**[0037]** In a third setting, (FIG. 9C) the second moveable reflector 702 is in the reflecting position and the first and third moveable reflectors 701, 703 are in the non-reflecting position. Accordingly, optical radiation received at the input I1 reflects from the second moveable reflector 702 and from the fixed reflector 704 and "passes-through" the third moveable reflector 703 to the output O2. Optical radiation received at the input I2 reflects from the second moveable reflector 702 and "passes-through" the first moveable reflector 701 to the output O1. Optical radiation received at the input I3 "passes-through" to the output O3.

**[0038]** In a fourth setting, (FIG. 9D) the first, second, and third moveable reflectors 701-703 are in the reflecting positions. Accordingly, optical radiation received at the input I1 reflects from the second moveable reflector 701 to the fixed reflector 704 to the third moveable reflector 703 to the output I3. Optical radiation received at the input I2 reflects from the second moveable reflector 702 to the first moveable reflector 701 to the third moveable reflector 703 to the output O2. Optical radiation received at the input I3 reflects from the first moveable reflector 701 to the output O1.

**[0039]** In an alternative fourth setting, (FIG. 9D') the first moveable reflector 701 is in the reflecting position and the second and third moveable reflectors 702, 703 are in the non-reflecting position. Accordingly, optical radiation received at the input I1 "passes through" the second moveable reflector 702 and reflects from the first moveable reflector 701 and "passes through" the third moveable reflector 703 to the output O3. Optical radiation received at the input I2 "passes through" the second moveable reflector 702 and reflects from the fixed reflector 704 and "passes through" the third moveable reflector 703 to the output O2. Optical radiation received at the input I3 reflects from the first moveable reflector 701 to the output O1.

[0040] The one of the alternative fourth settings may be chosen over the other based on the desired operation of the 4 x 4 MEM OXC switch. For example, one alternative fourth setting may be favored because it may provide fewer reflections in propagating the optical radiation from an input to an output or because the associated optical path is shorter.

[0041] In a fifth setting, (FIG. 9E) the first and second moveable reflectors **701**, **702** are in the reflecting position and the third moveable reflector **703** is in the non-reflecting position. Accordingly, optical radiation received at the input I1 reflects from the second moveable reflector **702** to the fixed reflector **704** and "passes through" the third moveable reflector **703** to the output O2. Optical radiation received at the input I2 reflects from the second moveable reflector **702** to the first moveable reflector **701** and "passes through" the third moveable reflector **703** and the output O3. Optical radiation received at the input I3 reflects from the first moveable reflector **701** to the output O1.

[0042] In an alternative fifth setting, (FIG. 9E') the first and third moveable reflectors **701**, **703** are in the reflecting position and the second moveable reflector **702** is in the non-reflecting position. Accordingly, optical radiation received at the input I1 "passes through" the second moveable reflector **702** and reflects from the first moveable reflector **701** and the third moveable reflector **703** to the output O2. Optical radiation received at the input I2 "passes through" the second moveable reflector **702** and reflects from the fixed reflector and the third moveable reflector **703** to the output O3. Optical radiation received at the input I3 reflects from the first moveable reflector **701** to the output O1.

[0043] In a sixth setting, (FIG. 9F) the second and third moveable reflectors **702**, **703** are in the reflecting position and the first moveable reflector **701** is in the non-reflecting position. Accordingly, optical radiation received at the input I1 reflects from the second moveable reflector **702** and the fixed reflector **704** and the third moveable reflector **703** to the output O3. Optical radiation received at the input I2 reflects from the second moveable reflector **702** and "passes through" the first moveable reflector **701** to the output O1. Optical radiation received at the input I3 "passes-through" the first moveable reflector **701** and reflects from the third moveable reflector **703** to the output O2.

[0044] According to another aspect of the present invention,  $(N^2-N)/2$  nodes can be utilized to create an N x N MEM OXC switch. In particular, the  $(N^2-N)/2$  switching nodes can be located on one side of a diagonal of the N x N array. One or more optical transmission apparatus' are located at the internal array positions along the diagonal. Accordingly, N x N OXC switches according to the present invention may include more moveable reflectors than determined by Equation (1). For example, a 4 x 4 MEM OXC switch according to the present invention can use 6 moveable reflectors and 2 fixed reflector. An 8 x 8 MEM OXC switch may be created using

28 moveable reflectors. In contrast, using Equation (1), these switches may include fewer movable reflectors.

[0045] FIG. 10 is a block diagram that illustrates embodiments of a 4 x 4 MEM OXC switch according to the present invention. According to FIG. 10, switches **801-805** can provide the interconnect needed to switch any of inputs I1-I4 to any of outputs O1-O4. As determined by equations (1) and (2), the 4 x 4 MEM OXC switch can include five switches to provide the needed 24 settings (4!) of the 4x4 MEM OXC switch.

[0046] In particular, each of the switches **801-805** can operate as a 2 x 2 switch. For example, switch **802** can switch optical energy from an input **802a** to an output **802c** and/or an output **802d**. Similarly, the switch **802** can switch optical energy from an input **802b** to the output **802c** and/or the output **802d**.

[0047] The switches **801-805** can be coupled together to provide the overall function of a 4 x 4 switch. Accordingly, optical energy can be switched from any input I1, I2, I3 and/or I4 to any output O1, O2, O3 and/or O4. In particular, the switch **802** can switch optical energy from the input I2 (**802b**) and/or input I3 (**802a**) to the switch **804** (via **802c**) and/or to the switch **801** (via **802d**). The switch **804** can switch optical energy from the switch **802** (via **804a**) and/or input I1 (via **804b**) to the switch **805** (via **804c**) and/or to the switch **803** (via **804d**).

[0048] The switch **801** can switch received optical energy (**801a**, **801b**) to the switch **805** (via **801c**) and/or to the switch **803** (via **801d**). The switch **803** can switch received optical energy from the switch **801** (via **803a**) and/or the switch **804** (via **803b**) to the output O2 (via **803c**) and/or to the output O1 (via **803d**). The switch **805** can switch received optical energy from the switch **801** (via **805a**) and/or the switch **804** (via **805b**) to the output O4 (via **805c**) and/or to the output O3 (via **805d**).

[0049] The dashed line through the switch **804** indicates that the output **802d** can be coupled to the input **801b** without being switched by the switch **801**. The dashed line through the switch **801** indicates that the output **804c** can be coupled to the input **805b** without being switched by the switch **801**.

[0050] FIG. 11 is a schematic diagram that illustrates embodiments of a 4 x 4 MEM OXC switch **800** according to the present invention. According to FIG. 11, a 3 x 3 array includes first, second, and third columns and first, second, and rows columns to define first, second, and third optical paths **811-813** in a first direction **825** and fourth, fifth, and sixth optical paths **814-816** in a second direction **835**. The optical paths are aligned with inputs and outputs of the 4 x 4 MEM OXC switch **800**.

[0051] In particular, input I1 is aligned with the second optical path **812**, input I2 is aligned with the first optical path **811**, input I3 is aligned with the sixth optical path **816**, and input I4 is aligned with the fifth optical path **815**. Output O1 is aligned with the second optical path **812**, output O2 is aligned with the fourth optical path **814**, output I3 is aligned with the third optical path **813**, and output I4 is aligned with the fifth optical path **815**.

[0052] First through fifth nodes 801-805 can selectively switch optical radiation from one optical path to another to propagate the optical radiation from any input to any output. For example, the second node 802 can switch optical radiation from the first optical path 811 to the sixth optical path 816 for transmission to the fourth node 804 or can pass the optical radiation through to the first node 801.

[0053] A first optical transmission apparatus 806 can selectively optically couple an output of the fourth node 804 to an input of the fifth node 805 for output via the output I3 or I4. The optical transmission apparatus 806 changes the direction of the propagation of the optical radiation received from the fourth node 804 from the second direction 835 to the first direction 825 at the input to the fifth node 805.

[0054] A second optical transmission apparatus 807 can optically couple an output of the first node 801 to an input of the third node 803 for output via the output O1 or O2. The optical transmission apparatus 807 changes the direction of the propagation of optical radiation received from the first node 801 from the first direction 825 to the second direction 835 at the input to the third node 803.

[0055] The first and second optical transmission apparatus 806, 807 are not switched. Accordingly, the first and second optical transmission apparatus 806, 807 can be fixed reflectors, linear waveguides, curvilinear waveguides or other apparatus that can change the direction of the propagation of the optical radiation.

[0056] FIG. 12 is a plan view that illustrates embodiments of a 4 x 4 MEM OXC switch 900 according to the present invention. According to FIG. 12, an array of first through seventh reflectors 901-907 are arranged, as shown, in first-third columns and first-third rows to define first, second, and third optical paths 911-913 in a first direction 925 and fourth, fifth, and sixth optical paths 914-916 in a second direction 935. The optical paths are aligned with inputs and outputs of the MEM OXC switch 900.

[0057] In particular, input I1 is aligned with the second optical path 912, input I2 is aligned with the first optical path 911, input I3 is aligned with the sixth optical path 916, and input I4 is aligned with the fifth optical path 915. Output O1 is aligned with the second optical path 912, output O2 is aligned with the fourth optical path 914, output O3 is aligned with the third optical path 913, and output O4 is aligned with the fifth optical path 915. In a preferred embodiment, at least one of the inputs is located on a separate side of the MEM OXC switch 900 from the other inputs. In another embodiment, at least one of the outputs is located on a separate side of the MEM OXC switch 900 from the other outputs.

[0058] The first through fifth reflectors 901-905 are moveable between a reflecting position and a non-reflecting position. The first through fifth moveable reflectors 901-905 are oriented 45 degrees relative to the optical paths and have reflective material on opposite sur-

faces thereof. The sixth and seventh reflectors 906, 907 are fixed. Accordingly, the first through fifth reflectors 901-905 can be used to reflect or "switch" optical radiation from the inputs along the optical paths therein to propagate the optical radiation from any input to any output. The reflective material can be, for example, gold on silicon or gold on polysilicon. Other reflective materials may be used.

[0059] FIG. 13 is a table that illustrates 24 switch settings for operations of a 4 x 4 MEM OXC switch according to the present invention. FIG. 14A-Y' is a series of plan views that illustrate embodiments of first through fifth moveable reflectors 901-905 in reflecting and non-reflecting positions for each of the 24 switch settings of FIG. 13 according to the present invention. A detailed explanation of each of FIGs. 14A-14Y' need not be provided because the reflectors can be positioned as shown in FIGs 14A-14Y' to provide the 24 settings needed.

[0060] FIG. 15 is a schematic diagram that illustrates another embodiment of a 4 x 4 MEM OXC switch including 5 switching nodes and first and second optical transmission apparatus according to the present invention. FIG. 16 is a plan view that illustrates another embodiment of a 4 x 4 MEM OXC switch including 5 moveable reflectors and 2 fixed reflectors according to the present invention.

[0061] FIG. 17 is a schematic diagram that illustrates another embodiment of a 4 x 4 MEM OXC switch 1400 including 6 switching nodes and first and second optical transmission apparatus according to the present invention. According to FIG. 17, a 3 x 3 array includes first, second, and third rows and first, second, and third columns that define first, second, and third optical paths 1411-1413 in a first direction 1425 and fourth, fifth, and sixth optical paths 1414-1416 in a second direction 1435. The optical paths are aligned with inputs and outputs of the 4 x 4 MEM OXC switch 1400.

[0062] In particular, input I1 is aligned with the first optical path 1411, input I2 is aligned with the sixth optical path 1416, input I3 is aligned with the fifth optical path 1415, and input I4 is aligned with the fourth optical path 1414. Output O1 is aligned with the first optical path 1411, output O2 is aligned with the second optical path 1412, output O3 is aligned with the third optical path 1413, and output O4 is aligned with the fourth optical path 1414.

[0063] First through sixth nodes 1401-1406 can selectively switch optical radiation from one optical path to another to propagate the optical radiation from any input to any output. For example, the fifth node 1405 can switch optical radiation from the fifth optical path 1415 to the second optical path 1412 for transmission to the fourth node 1404 or can pass the optical radiation through to the sixth node 1406.

[0064] A first optical transmission apparatus 1407 can optically couple an output of the third node 1403 to an input of the fifth node 1405. The first optical transmission

apparatus 1407 changes the direction of the propagation of optical radiation received from the third node 1403 from the second direction 1435 to the first direction 1425 at the input to the fifth node 1405.

[0065] A second optical transmission apparatus 1408 can optically couple an output of the fifth node 1405 to an input of the sixth node 1406 for output via the output O3 or O4. The second optical transmission apparatus 1408 changes the direction of the propagation of optical radiation received from the fifth node 1405 from the second direction 1435 to the first direction 1425 at the input to the sixth node 1406.

[0066] In FIGs. 15 and 16, the number of switching nodes/moveable reflectors can be determined by application of Equation (1). In particular the 4 x 4 OXC switches of FIGs. 15 and 16 can include 5 switching nodes/moveable reflectors. In contrast to FIG. 11, the moveable reflectors of FIG. 16 may be oriented in different directions.

[0067] The first and second optical transmission apparatus 1407, 1408 are not switched. Accordingly, the first and second optical transmission apparatus 1407, 1408 can be fixed reflectors, linear waveguides, curvilinear waveguides or other apparatus that can change the direction of the propagation of the optical radiation.

[0068] As described above,  $(N^2 - N)/2$  switching nodes can be utilized to create the embodiments illustrated by FIG. 17. For example, in the 4 x 4 OXC switch 1400 shown in FIG. 17,  $(N^2 - N)/2$  (or nodes 1401-1406) can be located on one side of a diagonal of a 4 x 4 array where the interenal array positions of the 4 x 4 array are populated by first and second optical transmission apparatus.

[0069] According to the present invention, a number of reflectors used to provide the functionality of an N x N MEM OXC switch can be reduced. In particular, the reduced number of reflectors can be expressed as: ceiling  $[\ln(N!)/\ln(2)]$ . Reducing the number of reflectors used in an N x N MEM OXC switch may allow for N x N switches that use fewer actuators than conventional N x N switches. Also, fewer reflectors and actuators may be formed on a smaller substrate area, allowing a reduction in the footprint of the N x N switch according to the present invention.

[0070] In the drawings and specification, there have been disclosed typical preferred embodiments of the invention and, although specific terms are employed, they are used in a generic and descriptive sense only and not for purposes of limitation, the scope of the invention being set forth in the following claims.

## Claims

1. An N x N Optical Cross-Connect (OXC) switch (800) having N inputs (I1-I4) to the OXC switch, where N is at least 3, and N outputs (O1-O4) from the OXC switch, wherein the N x N OXC switch provides N!

states that optically couple any one of the N inputs to any one of the N outputs, wherein the N x N OXC switch is **CHARACTERIZED BY**:

a number of switching nodes (801-805), selectively optically coupled to the N inputs and N outputs, wherein each of the number of switching nodes is configurable in at least one of a switching configuration and a pass-through configuration on a per input basis to provide selectively switched optical radiation therefrom and wherein the number of switching nodes is equal to ceiling  $[\ln(N!)/\ln(2)]$  to provide the N! states of the N x N OXC switch; and at least one optical transmission apparatus (806) optically coupled to at least two of the switching nodes.

2. An N x N Optical Cross-Connect (OXC) switch according to Claim 1, wherein the number of switching nodes is less than or equal to  $(N^2 - N)/2$  to provide the N! states of the N x N OXC switch.
3. An Optical Cross-Connect (OXC) switch according to Claim 1, wherein the optical transmission apparatus is **CHARACTERIZED AS** a non-moveable reflector (906).
4. An Optical Cross-Connect (OXC) switch according to Claim 1, wherein a first number of the N inputs are oriented orthogonal to a second number of the N inputs.
5. An Optical Cross-Connect (OXC) switch according to Claims 1 or 4, wherein a first number of the N outputs are oriented orthogonal to a second number of the N outputs.
6. An Optical Cross-Connect (OXC) switch according to Claims 1 or 3, wherein at least one switching node is **CHARACTERIZED BY** a moveable reflector having reflective material on opposite surfaces.
7. A method of operating an N x N Optical Cross-Connect (OXC) switch including selecting one of a number of reflector configurations of the OXC switch such that a selected one of N inputs (I1-I4) thereto is switched to a selected one of N outputs (O1-O4) thereof, the method being **CHARACTERIZED BY**: configuring a plurality of reflectors (801-805) in the selected one of a number of reflector configurations, wherein the number of the plurality of switching reflectors is equal to ceiling  $[\ln(N!)/\ln(2)]$ .
8. A method according to Claim 7, wherein the plurality of reflectors are **CHARACTERIZED AS** moveable reflectors that move between a reflecting position

and a non-reflecting position.

9. A method according to Claim 7 further **CHARACTERIZED BY:**  
propagating optical radiation from the selected input to the selected output via an optical path that includes at least one of the plurality of reflectors and at least one non-moveable reflector. 5
10. A method according to Claim 9, wherein the at least one non-moveable reflector is **CHARACTERIZED AS** a reflector that remains in the reflecting position. 10

15

20

25

30


35

40




45

50

55

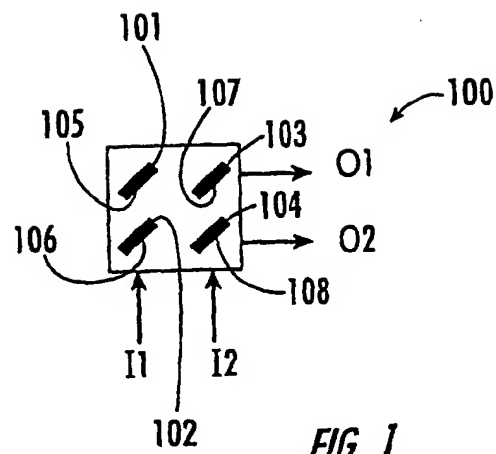

***FIG. 1.***  
***PRIOR ART***

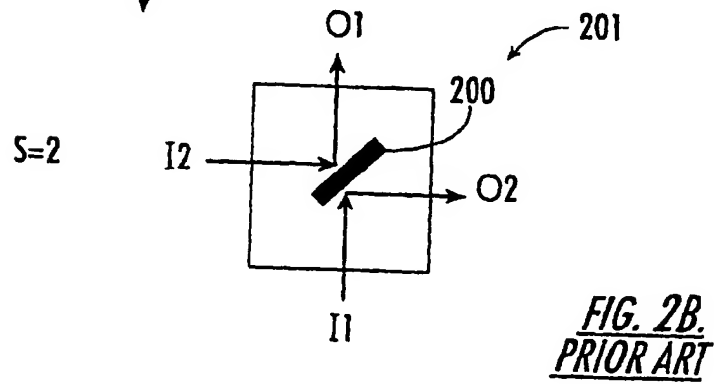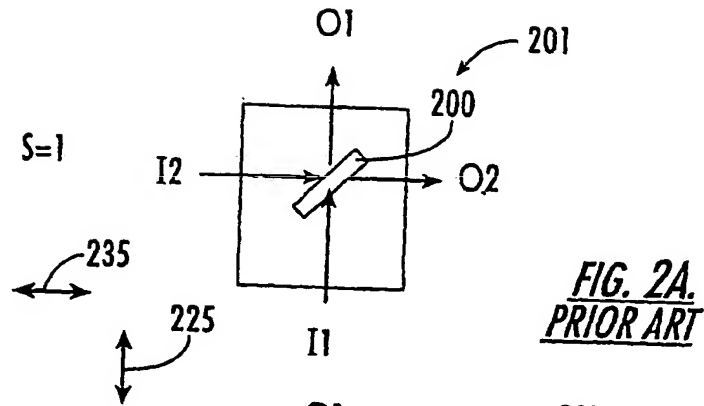

S	I1	I2
1	O1	O2
2	O2	O1

**FIG. 3.**  
**PRIOR ART**

S	I1	I2	I3	I4
1	O1	O2	O3	O4
2	O1	O3	O4	O2
3	O1	O4	O2	O3
4	O1	O2	O4	O3
5	O1	O4	O3	O2
6	O1	O3	O2	O4
7	O2	O3	O4	O1
8	O2	O4	O1	O3
9	O2	O1	O3	O4
10	O2	O3	O1	O4
11	O2	O1	O4	O3
12	O2	O4	O3	O1
13	O3	O4	O1	O2
14	O3	O1	O2	O4
15	O3	O2	O4	O1
16	O3	O4	O2	O1
17	O3	O2	O1	O4
18	O3	O1	O4	O2
19	O4	O1	O2	O3
20	O4	O2	O3	O1
21	O4	O3	O1	O2
22	O4	O1	O3	O2
23	O4	O3	O2	O1
24	O4	O2	O1	O3

**FIG. 13.**

S	I1	I2	I3
1	O1	O2	O3
2	O1	O3	O2
3	O2	O1	O3
4	O3	O2	O1
5	O2	O3	O1
6	O3	O1	O2

**FIG. 8.**



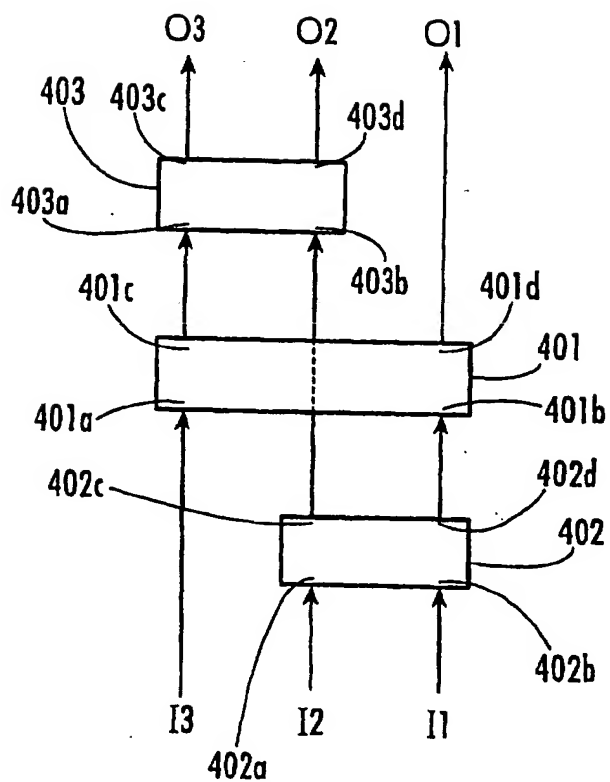


FIG. 4.

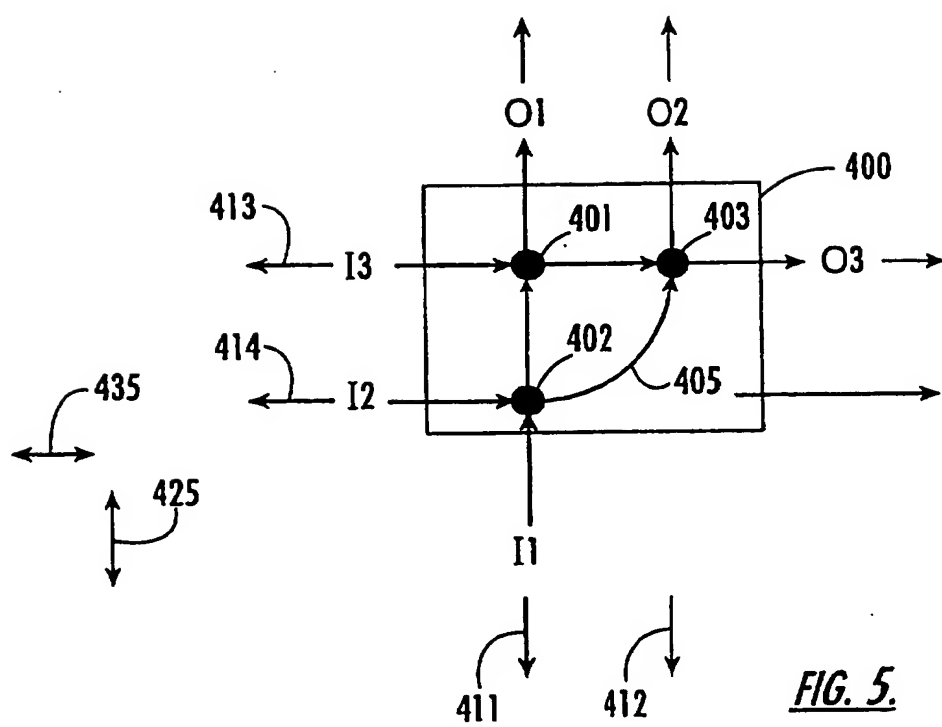

**FIG. 5.**

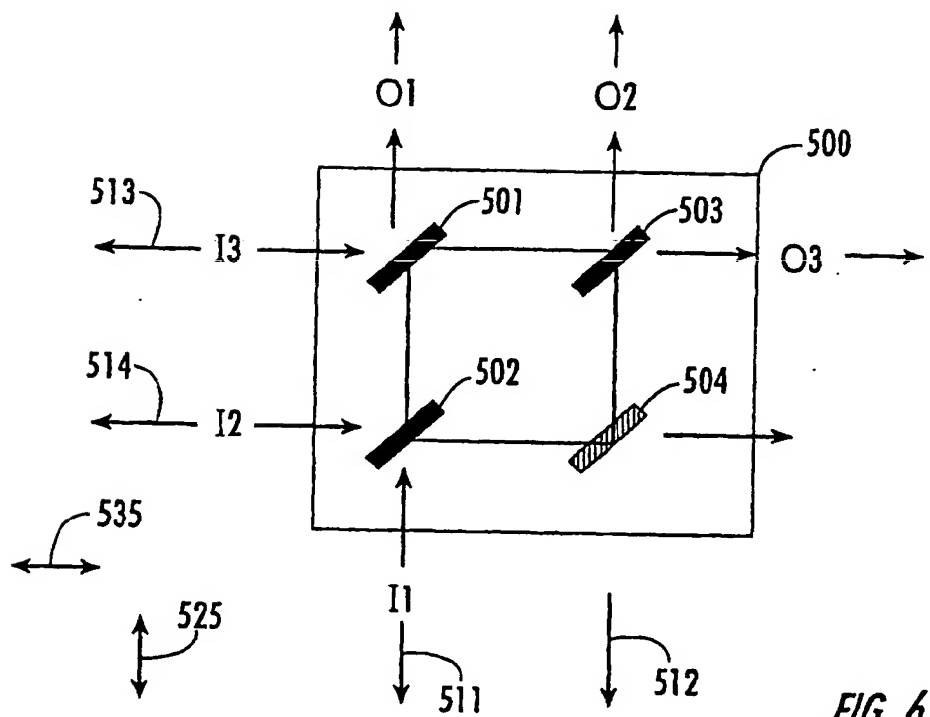

**FIG. 6.**

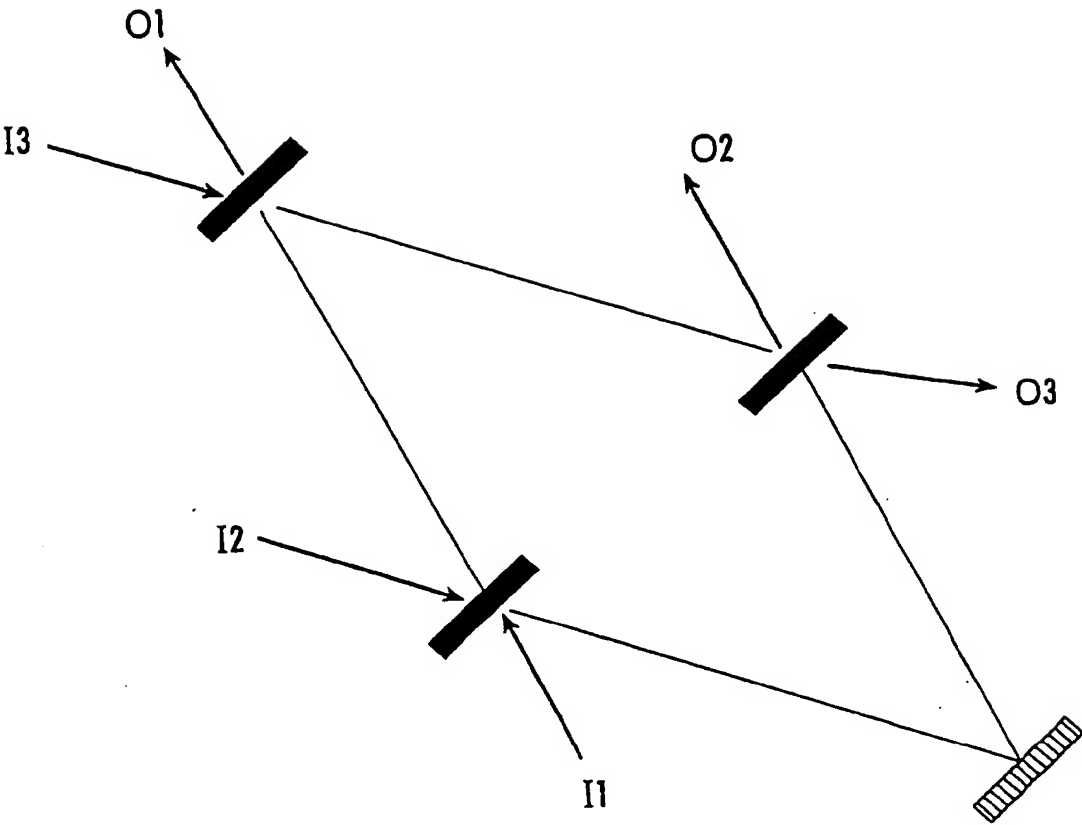
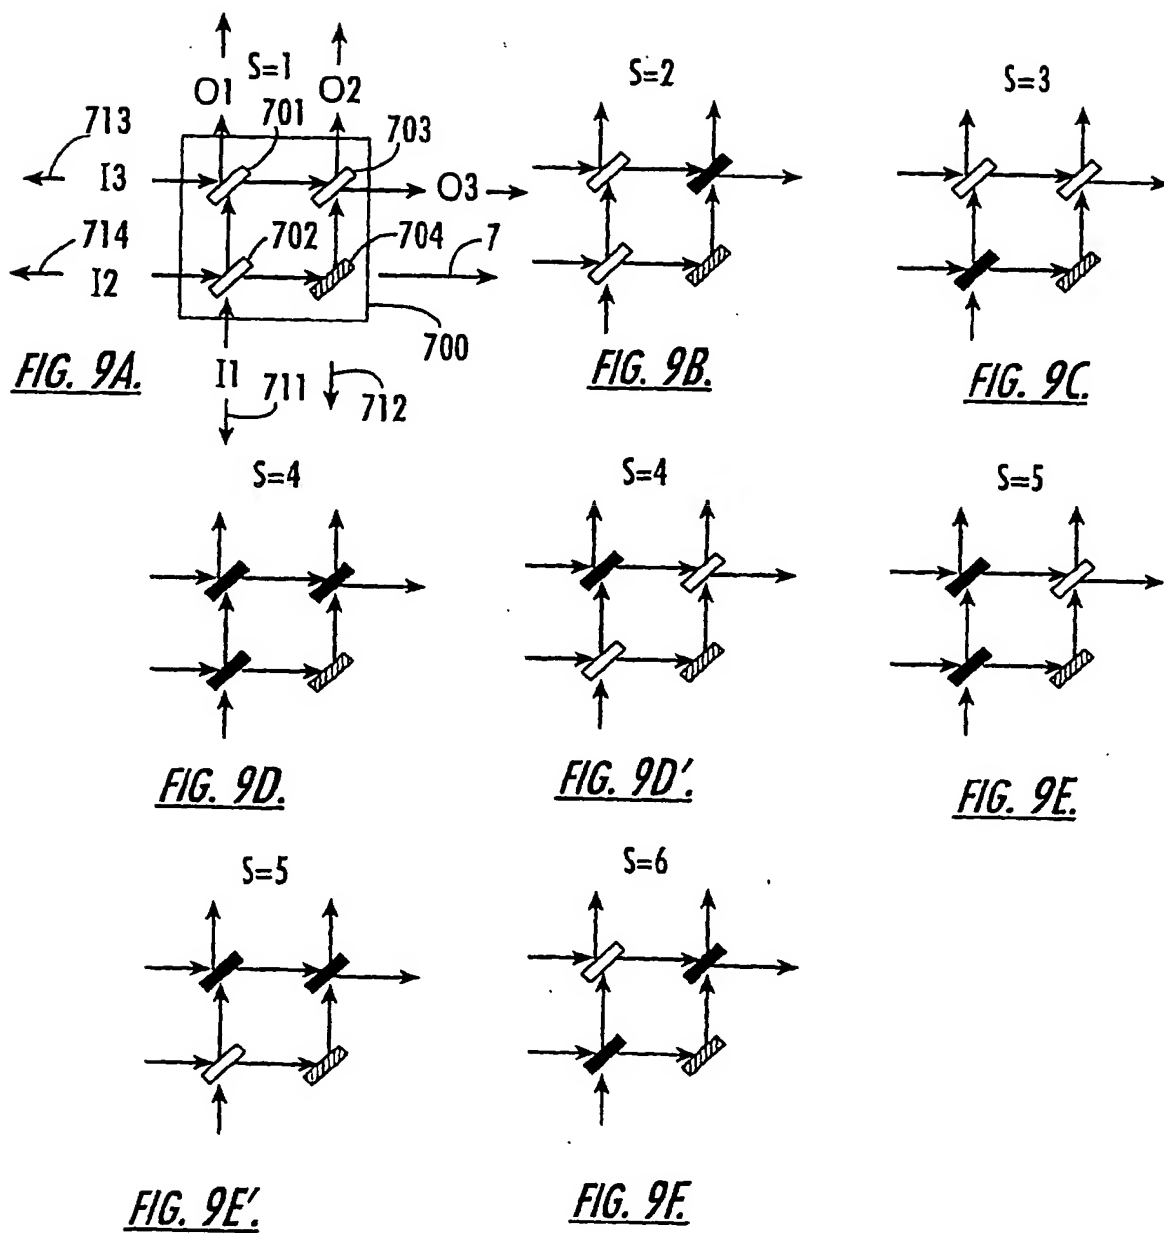


FIG. 7.





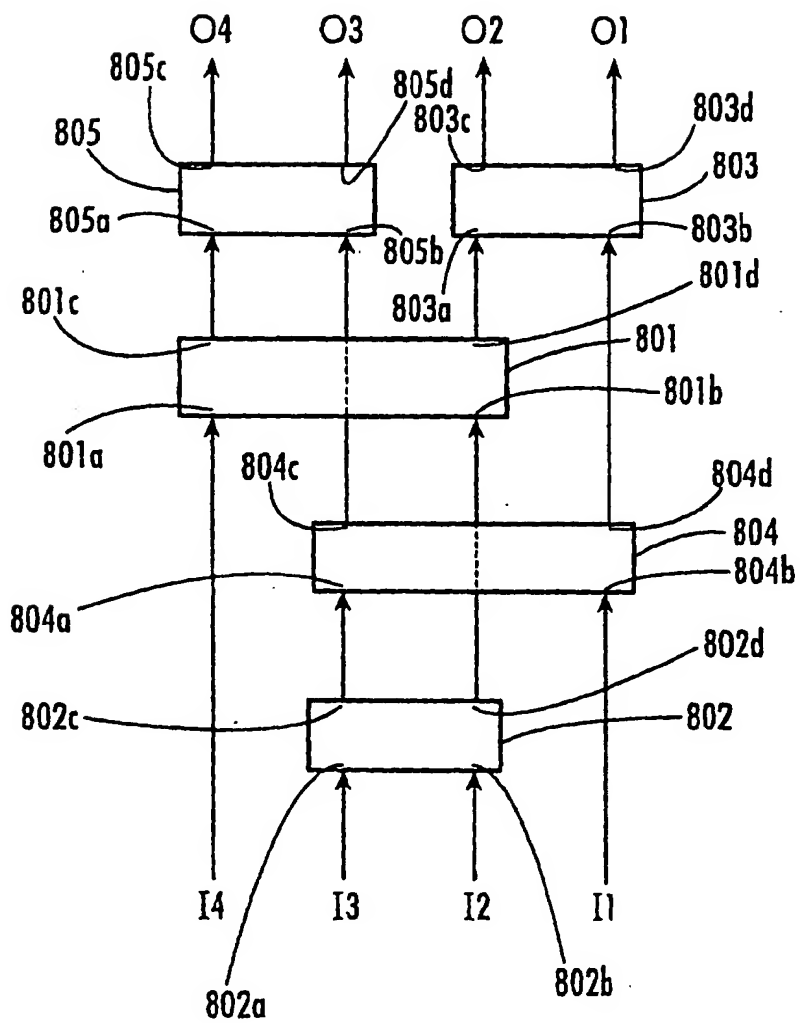


FIG. 10.

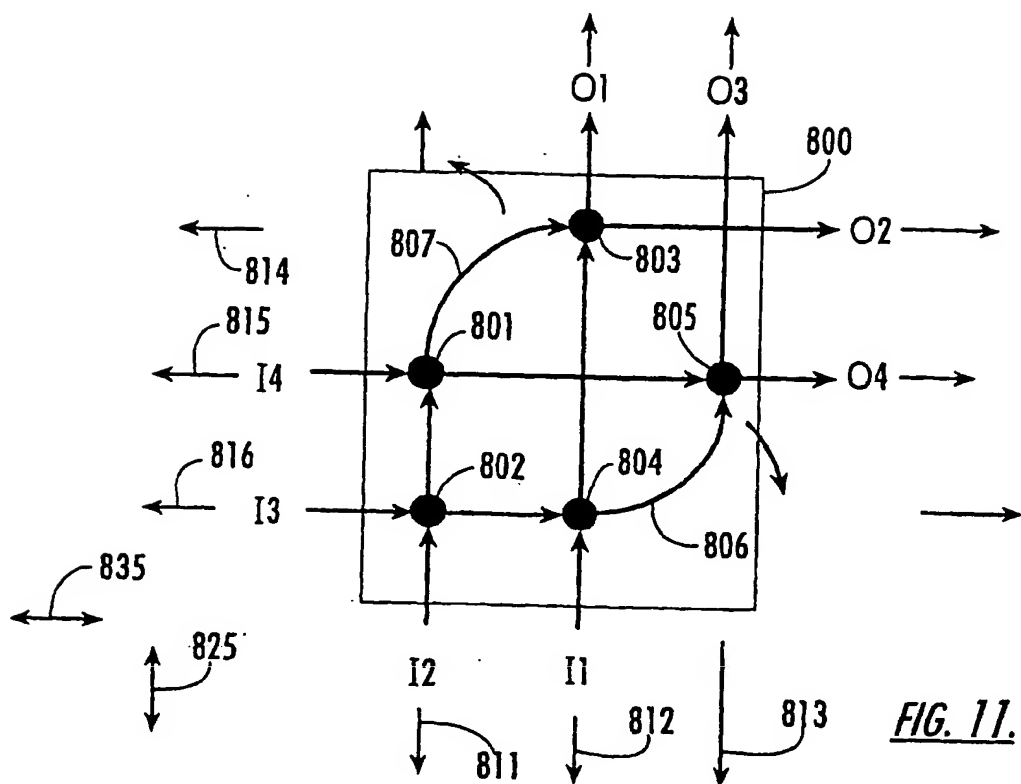

**FIG. 11.**

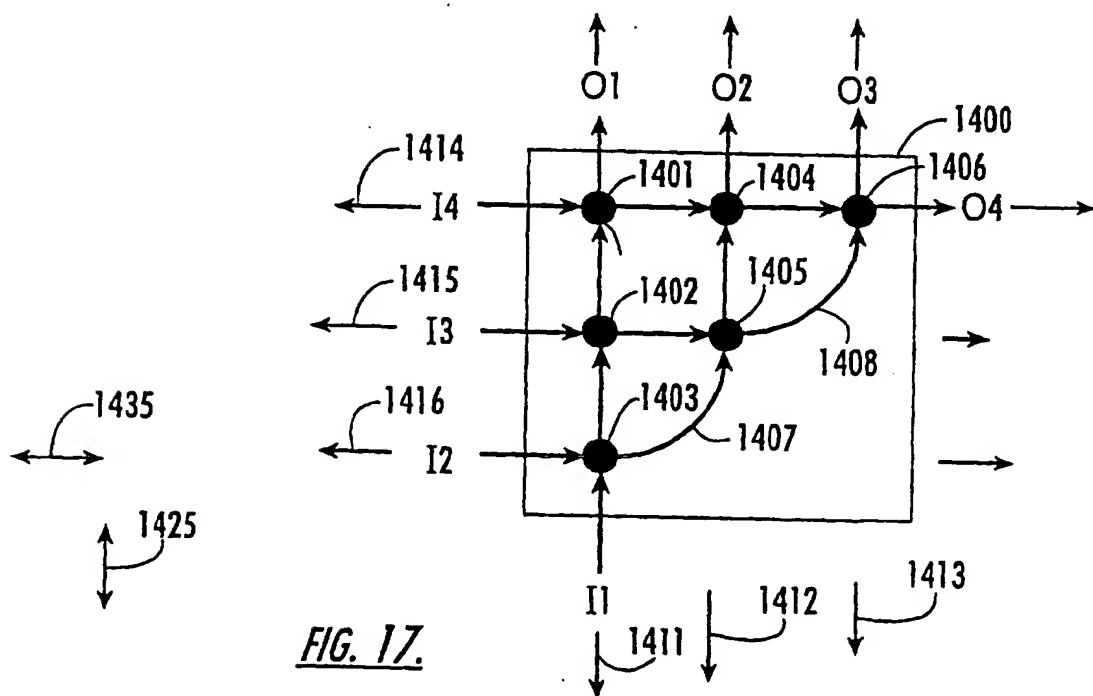

**FIG. 17.**

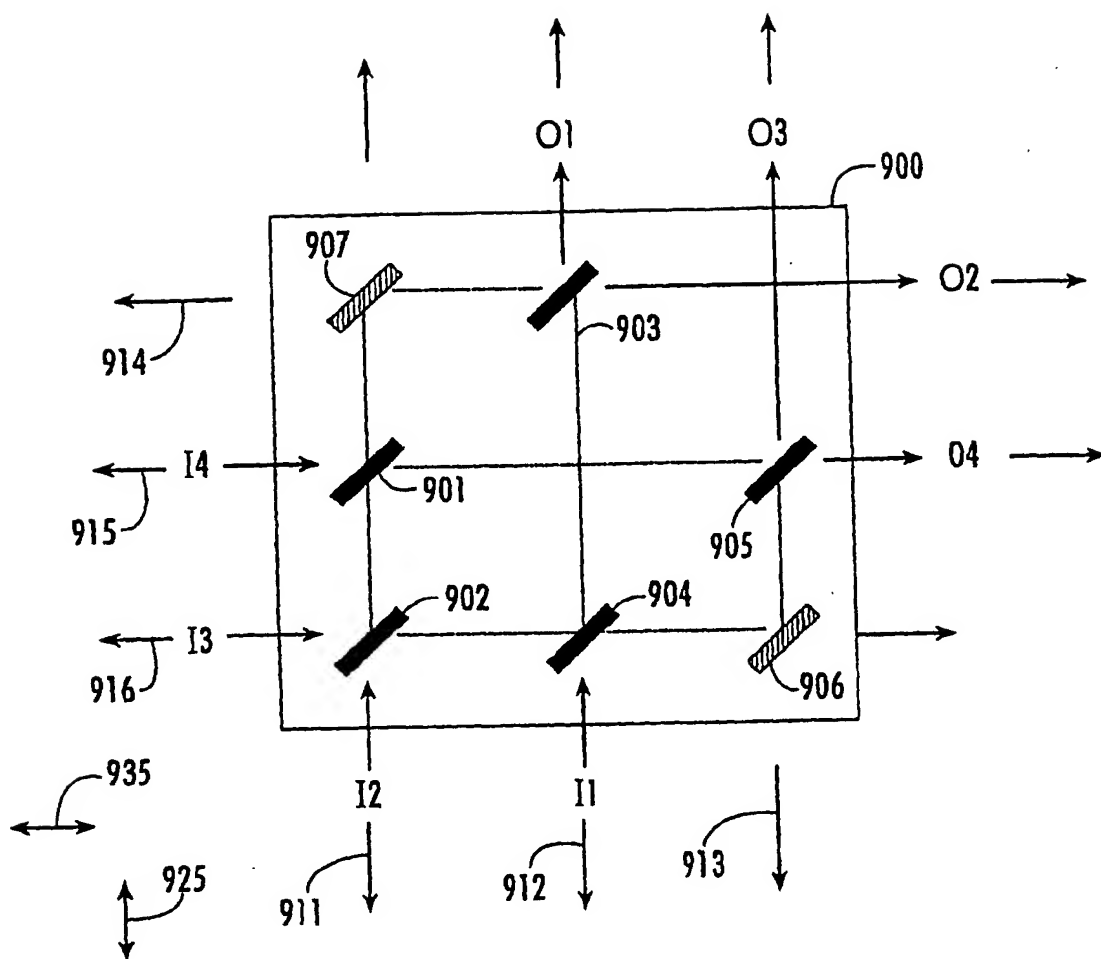
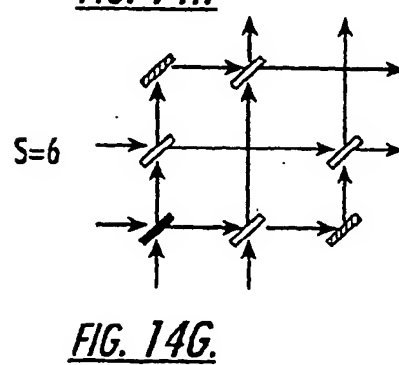
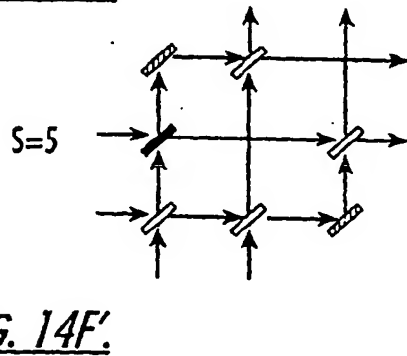
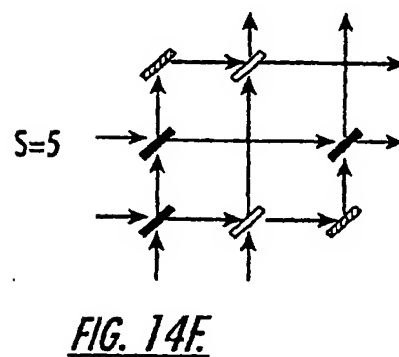
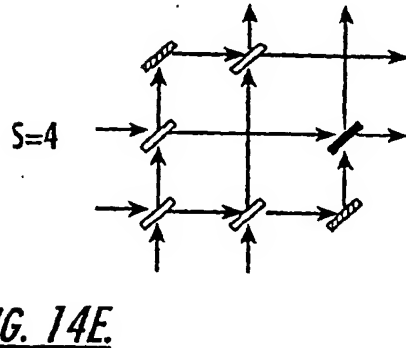
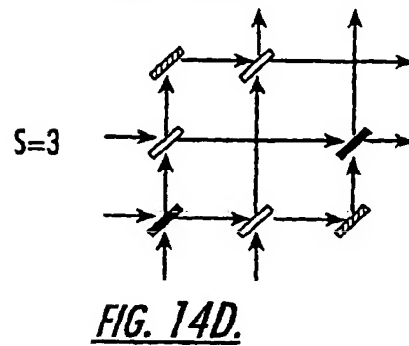
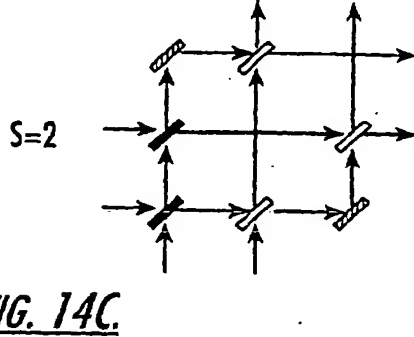
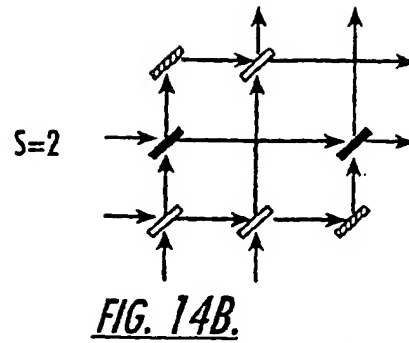
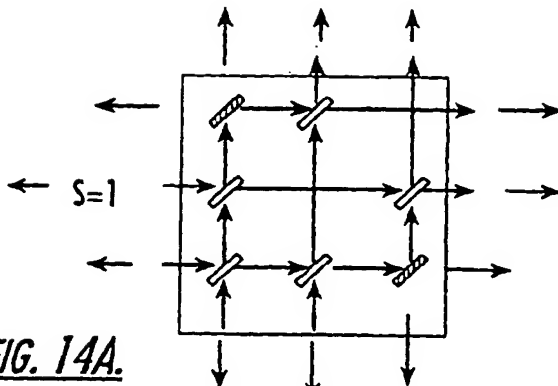


FIG. 12.



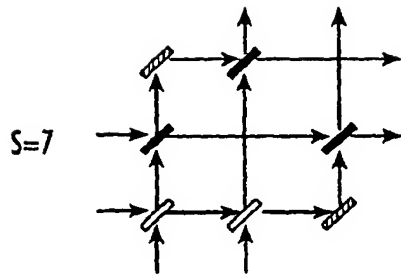


FIG. 14H.

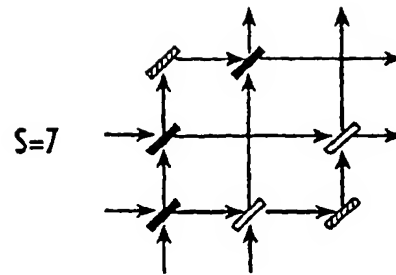


FIG. 14H'.

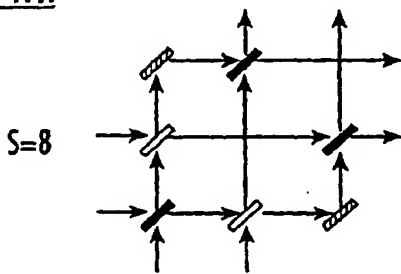


FIG. 14I.

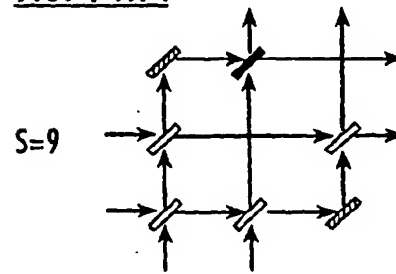


FIG. 14J.

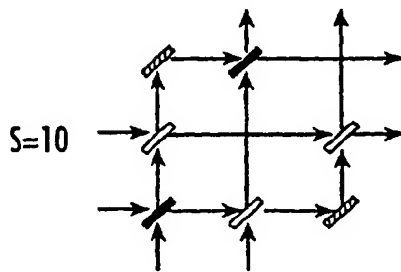


FIG. 14K.

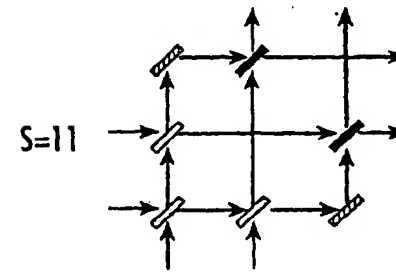


FIG. 14L.

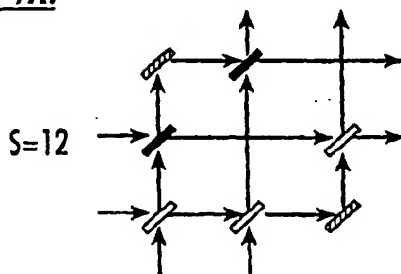


FIG. 14M.

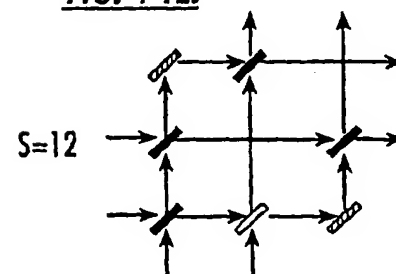


FIG. 14M'.

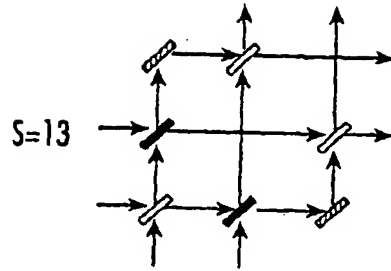


FIG. 14N.

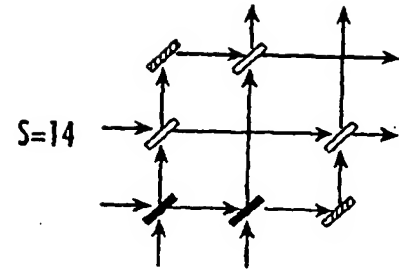


FIG. 14O.

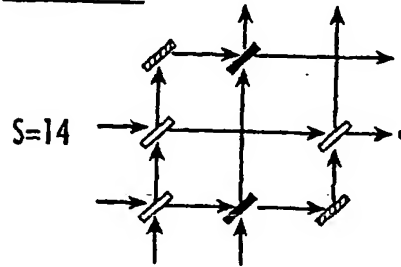


FIG. 14O'.

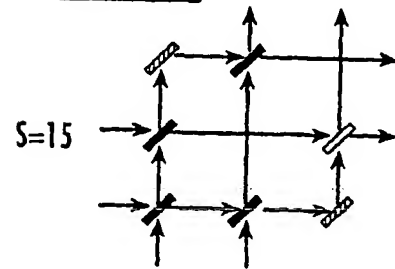


FIG. 14P.

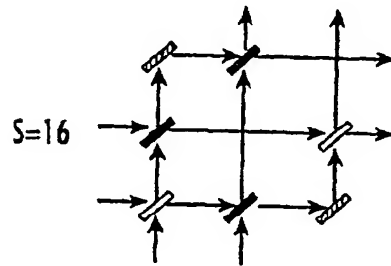


FIG. 14Q.

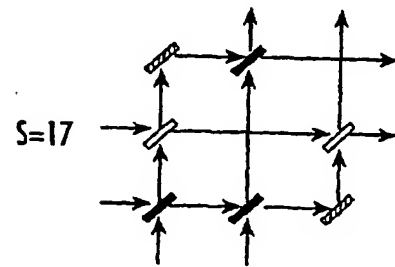


FIG. 14R.

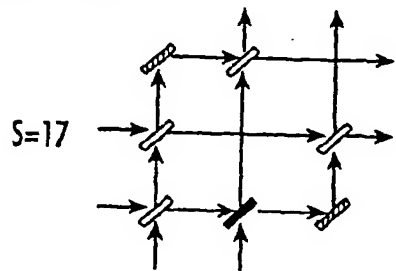


FIG. 14R'.

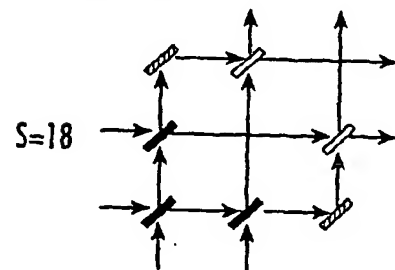


FIG. 14S.

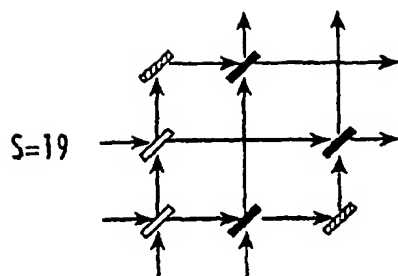


FIG. 14T.

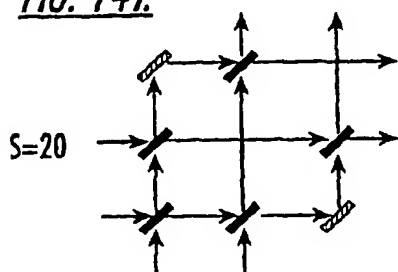


FIG. 14U.

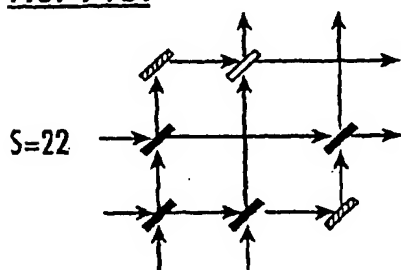


FIG. 14W.

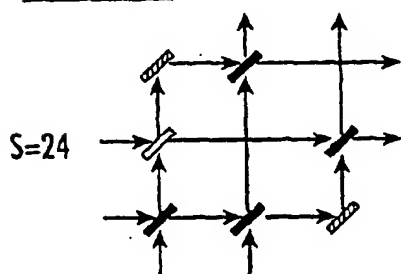


FIG. 14Y.

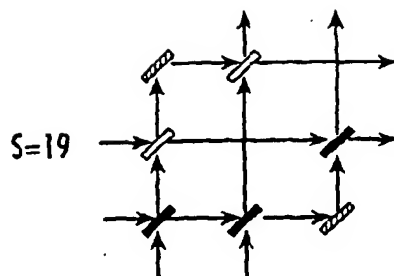


FIG. 14T'.

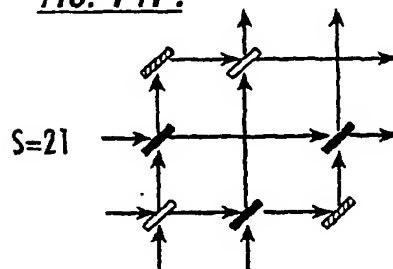


FIG. 14V.

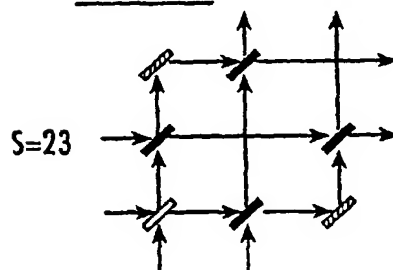


FIG. 14X.

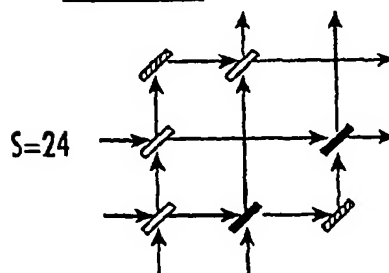


FIG. 14Y'.

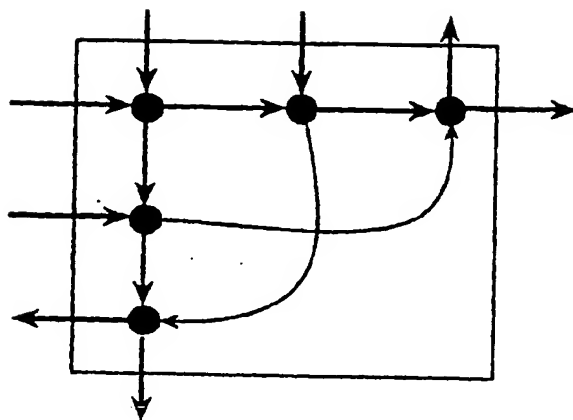


FIG. 15.


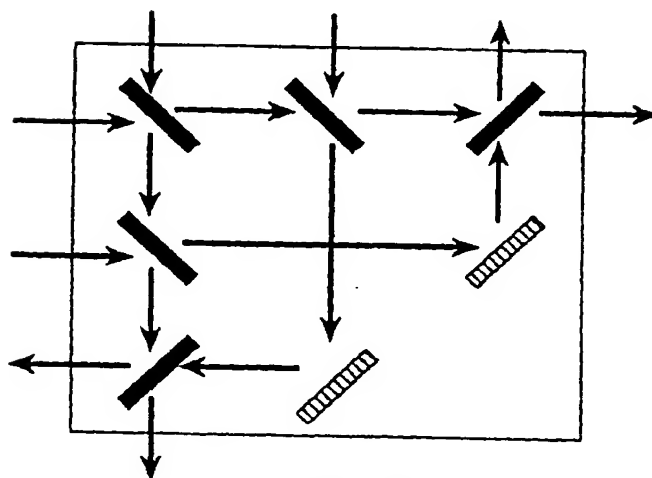


FIG. 16.



Europäisches Patentamt  
European Patent Office  
Office européen des brevets



(11) **EP 1 152 632 A3**

(12) **EUROPEAN PATENT APPLICATION**

(88) Date of publication A3:  
15.10.2003 Bulletin 2003/42

(51) Int Cl.7: **H04Q 11/00**

(43) Date of publication A2:  
07.11.2001 Bulletin 2001/45

(21) Application number: 01303811.2

(22) Date of filing: 26.04.2001

(84) Designated Contracting States:  
**AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU  
MC NL PT SE TR**  
Designated Extension States:  
**AL LT LV MK RO SI**

(72) Inventor: **Hill, Edward Arthur**  
**Chapel Hill, North Carolina 27514 (US)**

(74) Representative: **McKechnie, Neil et al**  
**Kennedys Patent Agency Limited,**  
**Floor 5, Queens House,**  
**29 St. Vincent Place**  
**Glasgow G1 2DT (GB)**

(30) Priority: 05.05.2000 US 566189

(71) Applicant: **Memscap S.A.**  
**38926 Crolles Cedex (FR)**

(54) **Microelectromechanical optical cross-connect switches having reduced numbers of reflectors**

(57) Reduced configuration Optical Cross-Connect (OXC) switches can include N inputs to the OXC switch and N outputs from the OXC switch, where N is at least 3. The N x N OXC switch provides N! states, wherein the N! states optically couple any one of the N inputs to any one of the N outputs. The N x N OXC switch also includes a number of switching nodes that are selectively optically coupled to the N inputs and N outputs. Each of the number of switching nodes is configurable in at

least one of a switching configuration and a pass-through configuration to provide selectively switched optical radiation therefrom and wherein the number of switching nodes is equal to ceiling  $\lceil \ln(N!)/\ln(2) \rceil$  to provide the N! states of the N x N OXC switch. The N x N OXC switch further includes at least one optical transmission apparatus coupled to at least two of the switching nodes. Related methods are also disclosed.

**EP 1 152 632 A3**



European Patent  
Office

# EUROPEAN SEARCH REPORT

Application Number  
EP 01 30 3811

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
X	US 5 377 182 A (MONACOS STEVE P) 27 December 1994 (1994-12-27)	1,2,7	H04Q11/00
A	* column 5, line 40 - column 6, line 46; figure 3 *	3-6,8-10	
X	--- PATENT ABSTRACTS OF JAPAN vol. 012, no. 035 (E-579), 2 February 1988 (1988-02-02)	1,2	
A	& JP 62 188589 A (NIPPON TELEGR & TELEPH CORP), 18 August 1987 (1987-08-18) * abstract * * figures 2-4 *	3-10	
X	--- US 5 581 643 A (WU CHI) 3 December 1996 (1996-12-03)	1,2,7	
A	* figures 2,10,13 *	3-6,8-10	
A	--- LIN L Y ET AL: "MICRO-ELECTRO-MECHANICAL SYSTEMS (MEMS) FOR WDM OPTICAL-CROSSCONNECT NETWORKS" MILCOM 1999. IEEE MILITARY COMMUNICATIONS CONFERENCE PROCEEDINGS. ATLANTIC CITY, NJ, OCT 31 - NOV. 3, 1999, IEEE MILITARY COMMUNICATIONS CONFERENCE, NEW YORK, NY: IEEE, US, vol. 2 OF 2 CONF. 18, 31 October 1999 (1999-10-31), pages 954-957, XP000922128 ISBN: 0-7803-5539-3 * page 954, left-hand column, last paragraph; figures 3,5,8 *	3-6,8-10	TECHNICAL FIELDS SEARCHED (Int.Cl.7)
A	--- US 5 982 554 A (LIN LIH-YUAN ET AL) 9 November 1999 (1999-11-09) * figure 7 *	3,9	H04Q
The present search report has been drawn up for all claims			
Place of search <b>THE HAGUE</b>		Date of completion of the search <b>19 August 2003</b>	Examiner <b>Meurisse, W</b>
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document			

EPO FORM 1503 03.02 (1/94C01)



European Patent  
Office

## EUROPEAN SEARCH REPORT

Application Number  
EP 01 30 3811

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
A	EP 0 933 963 A (JDS FITEC INC) 4 August 1999 (1999-08-04) * page 22, line 10 - line 26 * * page 23, line 7 - line 11 * ---	1-10	
A	JOEL A E: "ON PERMUTATION SWITCHING NETWORKS" BELL SYSTEM TECHNICAL JOURNAL, AMERICAN TELEPHONE AND TELEGRAPH CO. NEW YORK, US, vol. 47, no. 5, May 1968 (1968-05), pages 819-822, XP000843226 * figures 6,7,11 * -----	1-10	
			TECHNICAL FIELDS SEARCHED (Int.Cl.7)
The present search report has been drawn up for all claims			
Place of search <b>THE HAGUE</b>		Date of completion of the search <b>19 August 2003</b>	Examiner <b>Meurisse, W</b>
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document		T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document	

EPO FORM 1503 03 02 (P04C01)

**ANNEX TO THE EUROPEAN SEARCH REPORT  
ON EUROPEAN PATENT APPLICATION NO.**

EP 01 30 3811

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on  
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

19-08-2003

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 5377182	A	27-12-1994	NONE	
JP 62188589	A	18-08-1987	JP 1976851 C	17-10-1995
			JP 7014225 B	15-02-1995
US 5581643	A	03-12-1996	CA 2207175 A1	13-06-1996
			WO 9618131 A1	13-06-1996
			DE 69529626 D1	20-03-2003
			DE 69529626 T2	26-06-2003
			EP 0815490 A1	07-01-1998
			JP 10511777 T	10-11-1998
US 5982554	A	09-11-1999	NONE	
EP 0933963	A	04-08-1999	US 6292597 B1	18-09-2001
			US 6222955 B1	24-04-2001
			EP 0933963 A2	04-08-1999

EPO FORM P0459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82